





## D-IP SERIES

## D-IP 55 RACK

600x450mm and 600x600mm (WxD)



## HIGHLIGHTS

 IP55	Safety class rating IP55
	Available in heights from 7U up to 20U
	Load capacity 100 kg
	Secure Surface or Wall Mount

## D-IP 55 FEATURES

- Safety class rating IP55 for Outdoor applications
- Available in heights from 7U up to 20U
- Available with 450mm and 600mm depth
- Front door: sealed, locked and strong
- Swing handle lock fitted front door
- Rear wall has a cable entry with protective cover
- Load capacity 100 kg
- Integrated air ventilation inlets ensure the entry of fresh air
- Hinged fan module protective cover with snap-on feature
- Full height galvanized steel 19" profiles
- 19" profiles marked with U height position
- There are two alternatives, single and double walled
- Must be ordered with plinth for standing or with brackets for wall mount (sold separately)

## PRODUCT OVERVIEW

D-IP 55 series Outdoor cabinets are designed for industrial applications. They are based on IP55 safety class and protected against water and dirt ingress. Load capacity of 19" profile rails is 100 kg.

D-IP 55 series are available in a range of heights and depths and also as single or double walled. Integrated air ventilation inlets ensure the entry of fresh air from both sides. Each cabinet is designed with strength, ease of use and aesthetics in mind. Fully adjustable front and rear profile rails of the cabinet, make this product extremely attractive to installers.

Each rack consists of up to 1.5 mm strong steel sheet material which ensures a very good stability as a robust steel construction. An extensive accessories portfolio for plinths, shelves, cable management, etc. will help to meet many requirements in daily use.



## D-IP 55 RACK 600x450mm (WxD)

P/N	U	COLOR	RAL	HEIGHT (mm)	WIDTH (mm)	DEPTH (mm)	NET WEIGHT (mm)	LOAD CAPACITY (mm)
DIP55604507UG	7	GREY	7035	470	600	450	30	100
DIP55604509UG	9	GREY	7035	558	600	450	32	100
DIP55604512UG	12	GREY	7035	691	600	450	36	100
DIP55604516UG	16	GREY	7035	868	600	450	40	100
DIP55604520UG	20	GREY	7035	1046	600	450	44	100

P/N	U	COLOR	RAL	HEIGHT (mm)	WIDTH (mm)	DEPTH (mm)	NET WEIGHT (kg)	LOAD CAPACITY (kg)
DIP55604507UB	7	BLACK	9005	470	600	450	30	100
DIP55604509UB	9	BLACK	9005	558	600	450	32	100
DIP55604512UB	12	BLACK	9005	691	600	450	36	100
DIP55604516UB	16	BLACK	9005	868	600	450	40	100
DIP55604520UB	20	BLACK	9005	1046	600	450	44	100

## D-IP 55 RACK 600x450mm (WxD) // Double Walled

P/N	U	COLOR	RAL	HEIGHT (mm)	WIDTH (mm)	DEPTH (mm)	NET WEIGHT (mm)	LOAD CAPACITY (mm)
DIP55604507UG2	7	GREY	7035	470	600	450	40	100
DIP55604509UG2	9	GREY	7035	558	600	450	42	100
DIP55604512UG2	12	GREY	7035	691	600	450	46	100
DIP55604516UG2	16	GREY	7035	868	600	450	50	100
DIP55604520UG2	20	GREY	7035	1046	600	450	54	100

P/N	U	COLOR	RAL	HEIGHT (mm)	WIDTH (mm)	DEPTH (mm)	NET WEIGHT (kg)	LOAD CAPACITY (kg)
DIP55604507UB2	7	BLACK	9005	470	600	450	40	100
DIP55604509UB2	9	BLACK	9005	558	600	450	42	100
DIP55604512UB2	12	BLACK	9005	691	600	450	46	100
DIP55604516UB2	16	BLACK	9005	868	600	450	50	100
DIP55604520UB2	20	BLACK	9005	1046	600	450	54	100



## D-IP 55 RACK 600x600mm (WxD)

P/N	U	COLOR	RAL	HEIGHT (mm)	WIDTH (mm)	DEPTH (mm)	NET WEIGHT (mm)	LOAD CAPACITY (mm)
DIP55606007UG	7	GREY	7035	470	600	600	33	100
DIP55606009UG	9	GREY	7035	558	600	600	35	100
DIP55606012UG	12	GREY	7035	691	600	600	39	100
DIP55606016UG	16	GREY	7035	868	600	600	43	100
DIP55606020UG	20	GREY	7035	1046	600	600	47	100

P/N	U	COLOR	RAL	HEIGHT (mm)	WIDTH (mm)	DEPTH (mm)	NET WEIGHT (kg)	LOAD CAPACITY (kg)
DIP55606007UB	7	BLACK	9005	470	600	600	33	100
DIP55606009UB	9	BLACK	9005	558	600	600	35	100
DIP55606012UB	12	BLACK	9005	691	600	600	39	100
DIP55606016UB	16	BLACK	9005	868	600	600	43	100
DIP55606020UB	20	BLACK	9005	1046	600	600	47	100


## D-IP 55 RACK 600x600mm (WxD) // Double Walled

P/N	U	COLOR	RAL	HEIGHT (mm)	WIDTH (mm)	DEPTH (mm)	NET WEIGHT (mm)	LOAD CAPACITY (mm)
DIP55606007UG2	7	GREY	7035	470	600	600	44	100
DIP55606009UG2	9	GREY	7035	558	600	600	46	100
DIP55606012UG2	12	GREY	7035	691	600	600	50	100
DIP55606016UG2	16	GREY	7035	868	600	600	54	100
DIP55606020UG2	20	GREY	7035	1046	600	600	58	100


P/N	U	COLOR	RAL	HEIGHT (mm)	WIDTH (mm)	DEPTH (mm)	NET WEIGHT (kg)	LOAD CAPACITY (kg)
DIP55606007UB2	7	BLACK	9005	470	600	600	44	100
DIP55606009UB2	9	BLACK	9005	558	600	600	46	100
DIP55606012UB2	12	BLACK	9005	691	600	600	50	100
DIP55606016UB2	16	BLACK	9005	868	600	600	54	100
DIP55606020UB2	20	BLACK	9005	1046	600	600	58	100




## TECHNICAL DRAWING - Surface Mount with Plinth

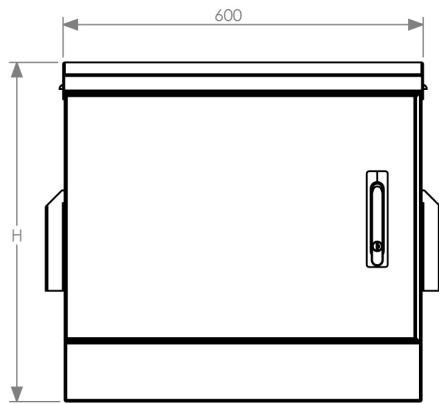


FRONT VIEW

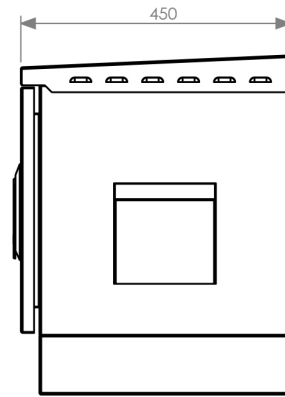


SIDE VIEW

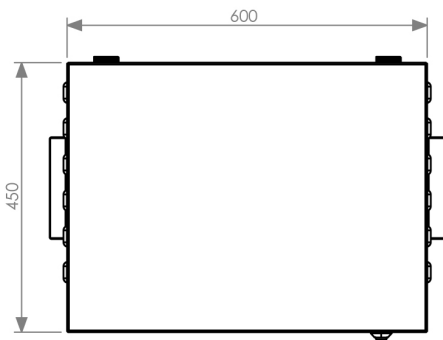


TOP VIEW

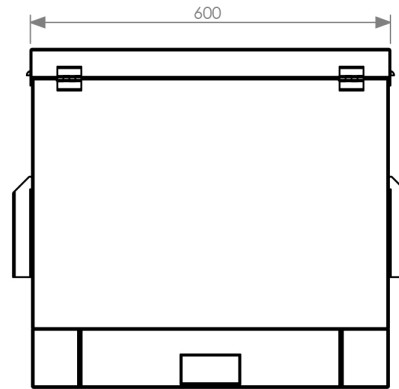

REAR VIEW

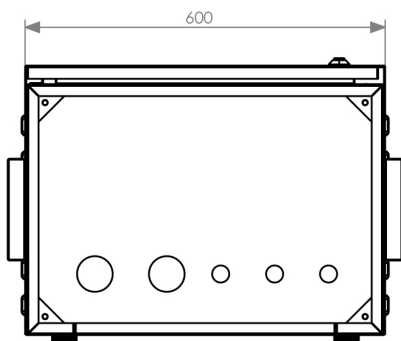


BOTTOM VIEW

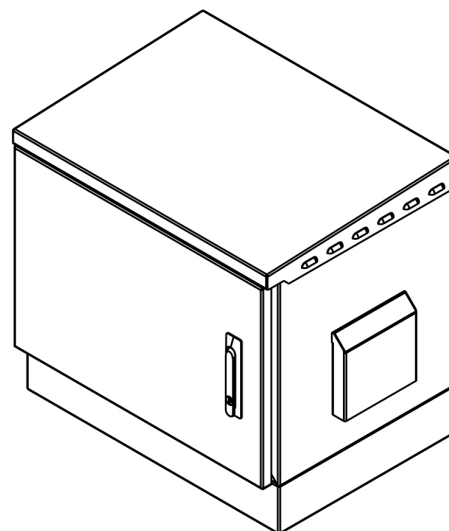


ISOMETRIC VIEW




## TECHNICAL DRAWING - Wall Mount

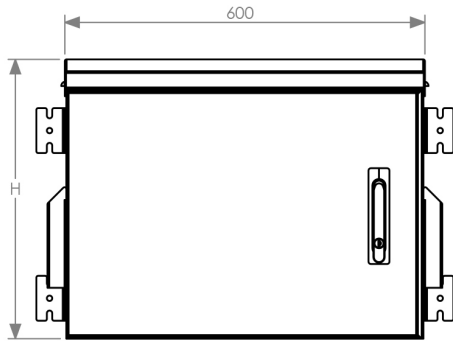


FRONT VIEW

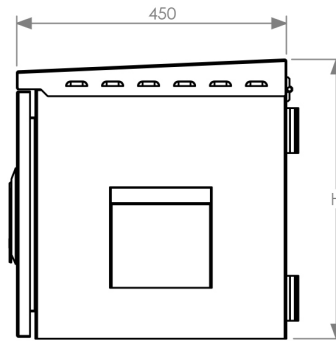


SIDE VIEW

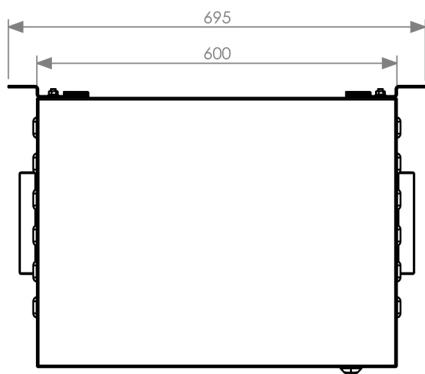


TOP VIEW

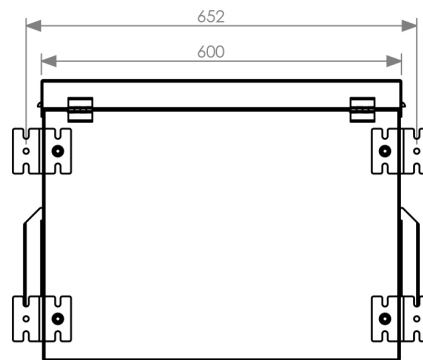

REAR VIEW

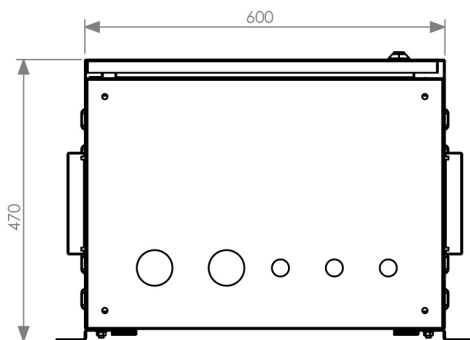

BOTTOM VIEW

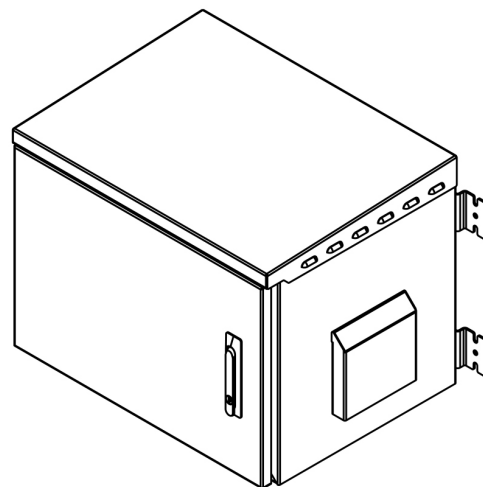

ISOMETRIC VIEW

